



DLD2325-E V2

23" TFT LCD, LED Backlight 1400nits, FHD(1920x1080)

The DLD2325-E is a 23 inch industrial grade sunlight readable LCD, with high brightness 1400 nits for sunlight readable application. It produce sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.

Key Features

- High Brightness 1400 nits
- Sunlight Readable
- LED Backlight
- Wide Viewing Angle of 178°(H), 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours



Specifications

Model Name	DLD2325-E V2
Description	23" TFT LCD, LED Backlight 1400 nits, FHD (1920x1080)
Screen Size	23"
Display Area (mm)	509.2 (H) x 286.5 (V)
Brightness	1400 cd/m ²
Resolution	1920 x 1080
Aspect Ratio	16 : 9
Contrast Ratio	1000 : 1
Pixel Pitch (mm)	0.2652(H) x 0.2652(V)
Pixel Pre Inch (PPI)	96
Viewing Angle	178°(H), 178°(V)
Color Saturation (NTSC)	80%
Display Colors	16.7M
Response Time (Typical)	14ms
Panel Interface	LVDS
AD Board Input Interface	VGA, DVI-D
Input Power	DC12V
Power Consumption	34.2W
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	535.6 x 314.2 x 35.4
Bezel Size(U/B/L/R)	11.6/11.6/10.9/10.9 mm
Weight (Net)	4kg
Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 60°C

DLD= Panel+ LED Driving Board + AD Control Board + Housing

Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.



Mechanical Drawing

Outline Dimensions

Unit: mm

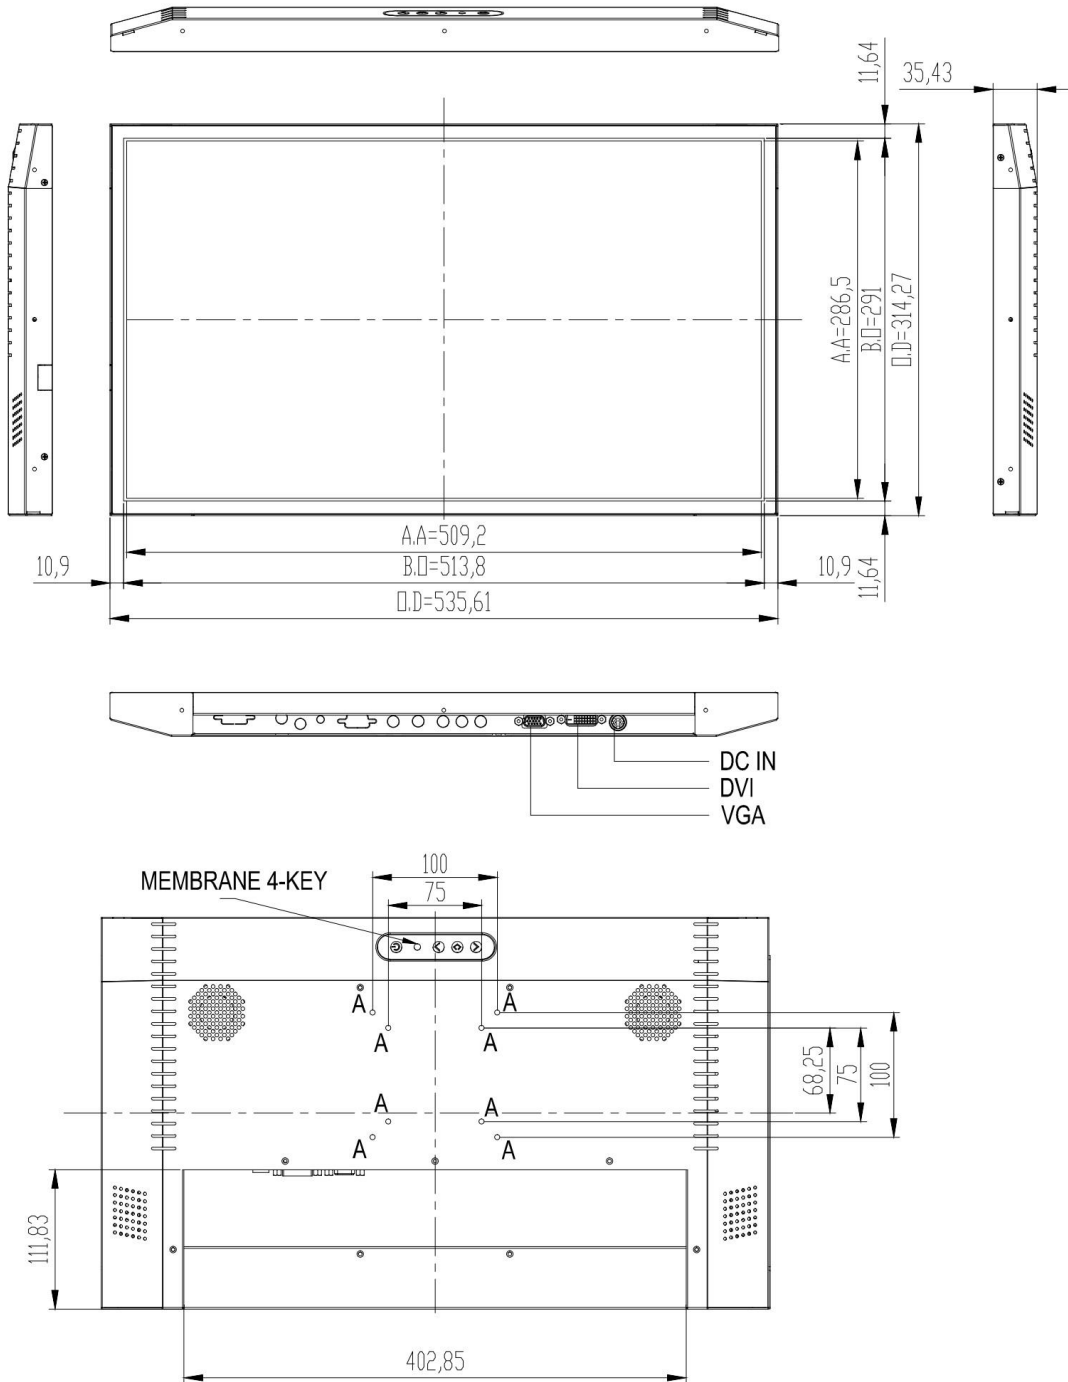

Note :
 O.D : Outline Dimension
 B.O : Bezel Opening
 A.A : LCD Active Area
 A:8-M4 User holes. The maximum penetration depth is 5mm.



Ordering Information

Part Number	Description
DLD2325-ENN-I11	23",1400nits,FHD,LID23A,AD6038GD,O/B,DC12V,V2

Optional Accessories

Part Number	Description
840612051212	ADAPTER,AC/DC,12V/5A,60W.Power-Din-4P,CWT.G99-ABF060F-N022.Efficiency-level-6,R
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301031	CABLE.POWER.AC.1830mm Japan type
810618301010	CABLE.POWER.AC.1830mm USA type

By Customer Request

Glass	Tempered glass, AR coating.....
-------	---------------------------------