




## Medical Display Series Solution

# MEDDP-722

22" Fanless Slim Medical LCD Monitor

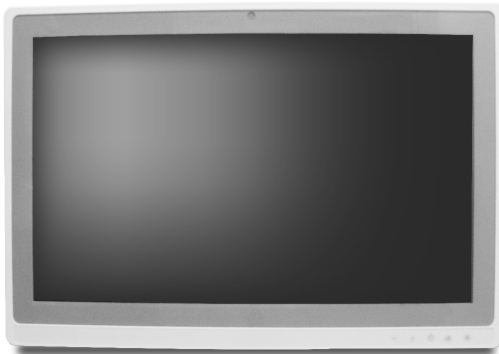

CE FC

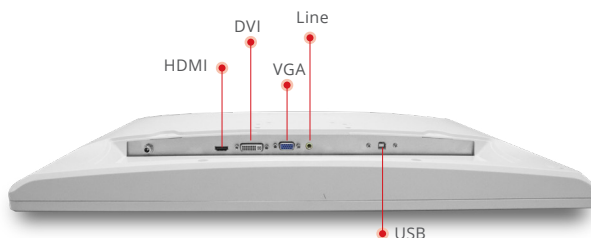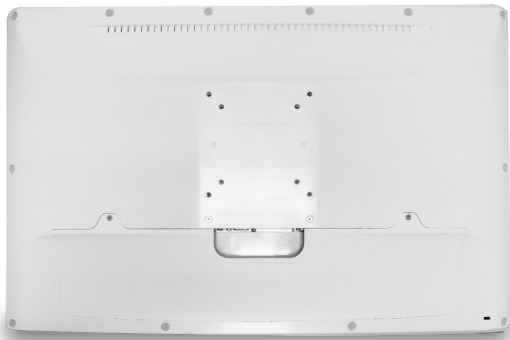

## Features

- 21.5" LCD Panel with LED Backlight
- Compact and TerseDesign
- DVI x 1, HDMI x 1, DPx1
- True Flat Screen with Capacitive Touch
- Speaker -2 x built-in
- Support 2M/5M Camera (Optional)

## Specifications

### Display

Size	21.5"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Brightness (Typ.)	250 nits
Viewing Angle (CR=10)(Typ.)	178°(H)/178°(V)
Contrast Ratio (Typ.)	3000:1
Touch Screen	Projective capacitive touch screen (optional)

### System

OS Support	Windows® 7, Windows® 10
Webcam	2MP / 5MP Camera with Mic (optional)

### I/O

Video Input	DVIx 1, HDMI x 1, VGA x1
Audio	Audio-in x 1
USB	USB x 1 for touch controller
Speaker	5W speaker x 2 on back side

### Mechanical and Environmental

Power Consumption	Full Loading :28.7Watts
Power Requirement	DC12V
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Dimension	527.3 x 348.5 x 55.1 mm
Packing Size	570 x 478 x 260 mm
Gross Weight	8.4kg (18.51lb)
Net Weight	5.7kg (12.56lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013/A12:2014(V3.1) FCC: Part 18 Class B

## Ordering Information

- » MEDDP-722-G1-A1-0010  
Monitor. 22".250 nits.DC 12V.Glass
- » MEDDP-722-G1-A2-0010  
Monitor. 22".250 nits.DC 12V.Glass.2M Camera
- » MEDDP-722-P1-A1-0010  
Monitor. 22".250 nits.DC 12V.PCT
- » MEDDP-722-P2-A1-0010  
Monitor. 22".250 nits.DC 12V.PCT.2M Camera

## Optional Accessories

- » 125530036A  
(AOH)(TF)Medical Power Adaptor.AC/DC.100 ~ 240V.12V.3A.36W.Adapter.  
ATM036T-P120(Level VI)