



## Output Specifications:


MODEL NO.	OUTPUT RAIL	LOAD				VOLTAGE ACCURACY	RIPPLE NOISE	LINE REG.	LOAD REG.
		MIN.	RATED	MAX.	PEAK				
SNP-G047 SNP-G047 -M	+12V	0A	3.33A		4.7A	+11.8V~+12.2V	100mVpp	±0.5%	±1%
SNP-G048 SNP-G048 -M	+15V	0A	2.66A		3.8A	+14.8V~+15.2V	100mVpp	±0.5%	±1%
SNP-G045 SNP-G045 -M	+18V	0A	2.22A		3.2A	+17.8V~+18.2V	100mVpp	±0.5%	±1%
SNP-G049 SNP-G049 -M	+24V	0A	1.66A		2.4A	+23.7V~+24.3V	150mVpp	±0.5%	±1%
SNP-G04G SNP-G04G-M	+28V	0A	1.42A		2.0A	+27.7V~+28.2V	150mVpp	±0.5%	±1%
SNP-G04J SNP-G04J -M	+36V	0A	1.11A		1.6A	+35.6V~+36.4V	150mVpp	±0.5%	±1%
SNP-G04T SNP-G04T-M	+48V	0A	0.83A		1.16A	+47.6V~+48.4V	150mVpp	±0.5%	±1%

### Note:


- Standby Power Consumption with System:**  
For computers and displays, ENERGY STAR in U.S. and ErP regulation in Europe require the input power should be less than 0.5W at standby mode.
- Output Load:**  
40W for convection cooling; 48W for forced air cooling.
- Peak Load Duration:**  
Peak 56W can last for 5 sec.
- Isolation Grade:**  
Primary ↔ Ground : 1MOPP (1500Vac)  
Primary ↔ Secondary : 2MOPP (4000Vac)  
Secondary ↔ Ground : 1MOPP (1500Vac)
- Leakage Current:**  
Earth leakage current < 300uA  
Touch current < 100uA
- EMI Grounding:**  
If there is a metal sheet under the power supply, connect the EMI ground to the metal sheet.
- Model Selection:**  
SNP-G04x is for ITE application.  
SNP-G04x-M is for medical application.

## Performance for SNP-G047:


### 1. Switching frequency ripple

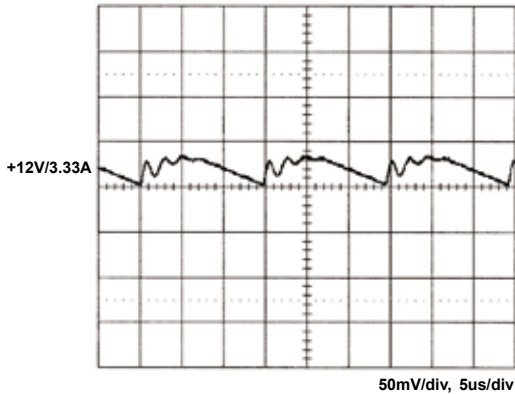


### 2. Line frequency ripple

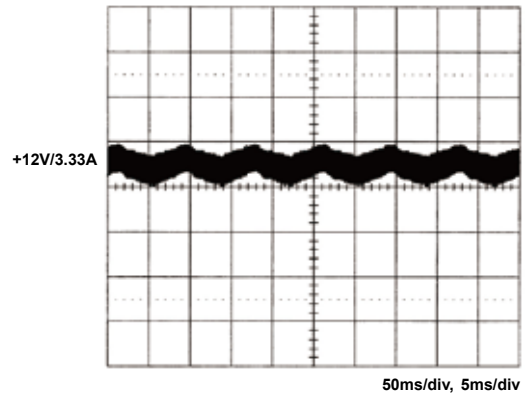


### 3. Output turn on wave form

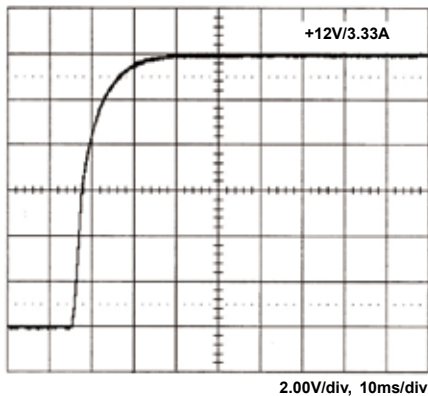


### 4. Output turn off wave form

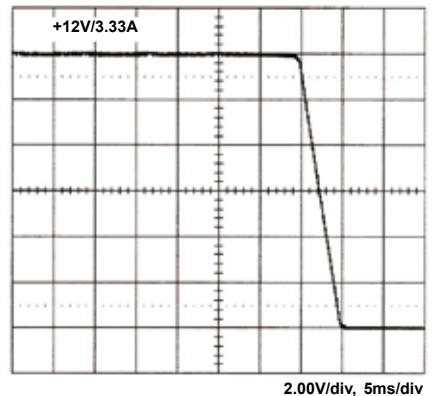


### 5. Hold-up time

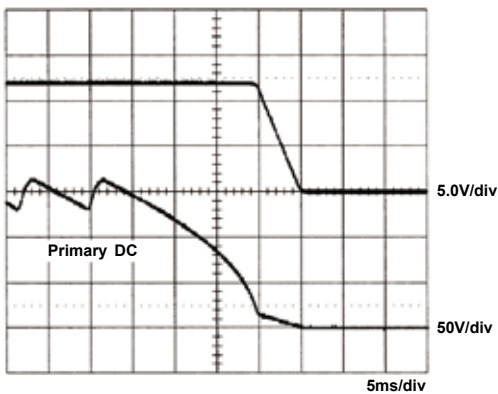


### 6. Over voltage protection

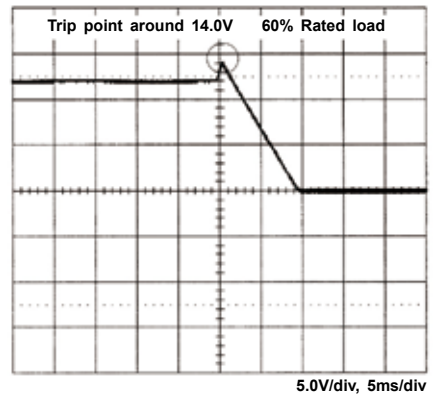


### 7. +12V step response

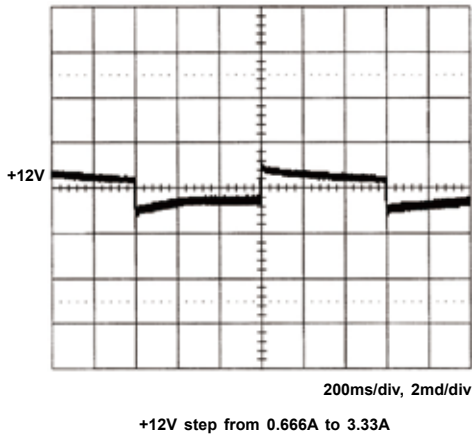


### 8. FCC B Class I

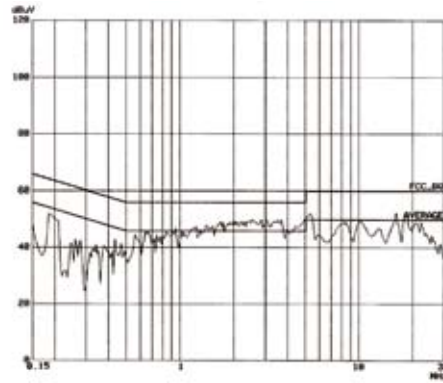


### 9. CISPR 22 B Class I

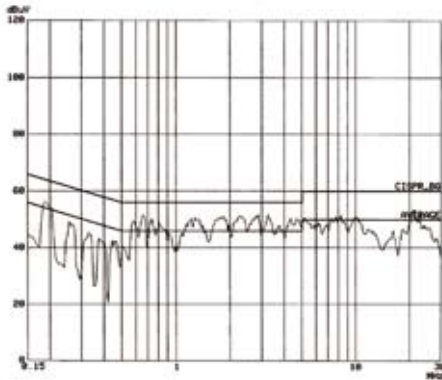

### 10. FCC B Class II

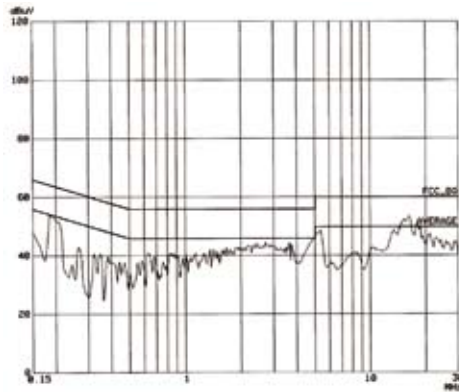

### 11. CISPR 22 B Class II

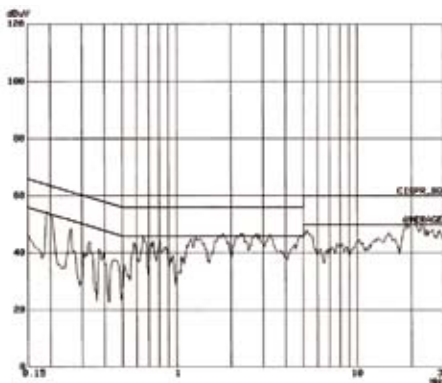

### 12. Power derating curve

