

2" x 4" x 1.18"

General Specifications:

Input voltage 90VAC to 264VAC
 Input frequency..... 47Hz to 63Hz
 Inrush current < 40A at 115VAC
 (cold start at 25°C) or < 70A at 230VAC
 Efficiency 77%~87% depends on models
 at rated load and 115VAC
 Hold up time 15ms typical
 at rated load and 115VAC, or 230VAC
 Over load protection auto recovery
 Short circuit protection auto recovery

Features:


- Only 1.18 inch height
- With ITE & Medical safety
- Efficiency between 77% to 87%
- Operation from 0°C to 70°C by convection

Applications:

- For dental, laboratory products, pumps, monitors, sleep apnea devices and many other uses.

Over voltage protection latch off
 Operating temperature 0°C to 70°C convection
 derating: 2.5% / °C > 50°C
 Cooling free air convection
 Storage temperature -40°C to +85°C
 EMI FCC "B"
 EN55022"B", EN55011"B"
 EMS EN61000-4-2,-3,-4,-5,-6,-8,-11
 SafetyUL 60950-1, UL 60601-1
 CSA C22.2 No. 60950-1, No. 60601.1
 EN 60950-1, EN 60601-1

Mechanical Specifications:

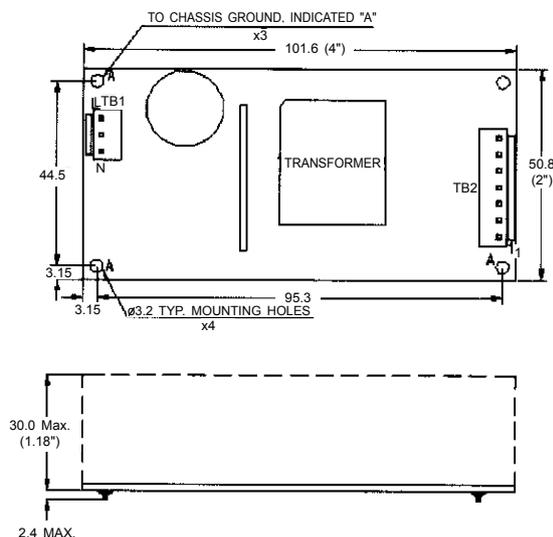

Notes:

1. Size:
2" x 4" x 1.18"
2. Mounting Hole:
44.5 x 95.3 (mm)
3. Connectors:
AC input : JST B6P3-VH or equivalent
DC output : JST B6P-VH or equivalent for single output
JST B7P-VH or equivalent for multiple outputs
4. Output Pin assignment:

PIN NO.	1	2	3	4	5	6	7
SNP-Z061	-12V	+5V	+5V	GND	GND	+12V	+12V
SNP-Z06D	+12V	+5V	+5V	GND	GND	+3.3V	+3.3V
SNP-Z063	NC	+5V	+5V	GND	GND	+12V	+12V
SNP-Z06A	NC	+5V	+5V	GND	GND	+24V	+24V
SNP-Z066-1	GND	GND	GND	+5V	+5V	+5V	
SNP-Z067	+5V	GND	GND	GND	GND	+12V	+12V
SNP-Z067-1	NC	GND	GND	GND	GND	+12V	+12V
SNP-Z068	+5V	GND	GND	GND	GND	+15V	+15V
SNP-Z068-1	NC	GND	GND	GND	GND	+15V	+15V
SNP-Z069	+5V	GND	GND	GND	GND	+24V	+24V
SNP-Z069-1	NC	GND	GND	GND	GND	+24V	+24V
SNP-Z06T	NC	GND	GND	GND	GND	+48V	+48V

5. Packing:
Net weight: 140 g approx. / unit
Gross weight: 13.5 kg approx. / carton, 80 units / carton
Carton size (mm): 382 (L) x 374 (W) x 277 (H)

-Kevin-

10 years Warranty (contact Skynet's Distributors for details)

Output Specifications:


MODEL NO.	OUTPUT RAIL	LOAD				VOLTAGE ACCURACY	RIPPLE NOISE	LINE REG.	LOAD REG.	EFFICIENCY TYPICAL
		MIN.	RATED	MAX.	PEAK					
SNP-Z061	+5V	0A	3A		5A	+4.95V~+5.05V	1%	±1%	±3%	82%
	+12V	0A	3A		5A	+11.4V~+12.6V	1%	±1%	±3%	
	-12V	0A	0.3A			-11.4V~-12.6V	1%	±1%	±5%	
SNP-Z06D	+3.3V	0A	4.5A		6A	+3.2V~+3.4V	50mV	±1%	±3%	80%
	+5V	0A	3A		5A	+4.75V~+5.25V	1%	±1%	±3%	
	+12V	0A	0.7A			+11.4V~+12.6V	1%	±1%	±5%	
SNP-Z063	+5V	0A	3A		6A	+4.95V~+5.05V	1%	±1%	±3%	82%
	+12V	0A	3A		5A	+11.4V~+12.6V	1%	±1%	±3%	
SNP-Z06A	+5V	0A	4A		6A	+4.95V~+5.05V	1%	±1%	±3%	83%
	+24V	0A	1.5A		3A	+22.8V~+25.2V	1%	±1%	±3%	
SNP-Z066-1	+5V	0A	12A		18A	+4.95V~+5.05V	1%	±0.5%	±0.5%	85%
SNP-Z067	+12V	0.1A	4.8A		7.5A	+11.88V~+12.12V	0.5%	±1%	±1%	82%
	+5V	0A	0.5A			+4.75V~+5.25V	1%	±1%	±1%	
SNP-Z067-1	+12V	0.1A	5A		7.5A	+11.88V~+12.12V	0.5%	±1%	±1%	85%
SNP-Z068	+15V	0A	3.8A		6A	+14.85V~+15.15V	0.5%	±1%	±1%	84%
	+5V	0A	0.5A			+4.75V~+5.25V	1%	±1%	±1%	
SNP-Z068-1	+15V	0.1A	4.3A		6A	+14.85V~+15.15V	0.5%	±1%	±1%	85%
SNP-Z069	+24V	0.1A	2.4A		3.7A	+23.75V~+24.24V	0.5%	±1%	±1%	85%
	+5V	0A	0.5A			+4.75V~+5.25V	1%	±1%	±1%	
SNP-Z069-1	+24V	0.1A	2.7A		3.7A	+23.75V~+24.24V	0.5%	±1%	±1%	85%
SNP-Z06T	+48V	0A	1.35A		1.9A	+47.6V~+48.4V	0.5%	±0.5%	±0.5%	87%

Note:


- At peak load, the output can last for 8 seconds without shut down.
- The maximum combinational load of SNP-Z06D for +3.3V & +5V is 30W.
- At factory, all outputs in 60% rated load condition, each output is checked to be within the accuracy range while the main output is setting to within the specified accuracy range at rated load.
- Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
- Load regulation is defined by changing ±40% of measured output load from 60% rated load at another output set to 60% rated load.
- Ripple & noise is measured by using 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line.
- Hold up time is measured from the end of the last charging pulse to the time which the main output drop down to regulation limit at rated load and nominal line.
- The efficiency is measured at nominal line and rated load.
- Model Selection:
SNP-Z06x is for both of ITE application and medical application.

Performance for SNP-Z061:


1. Switching frequency ripple

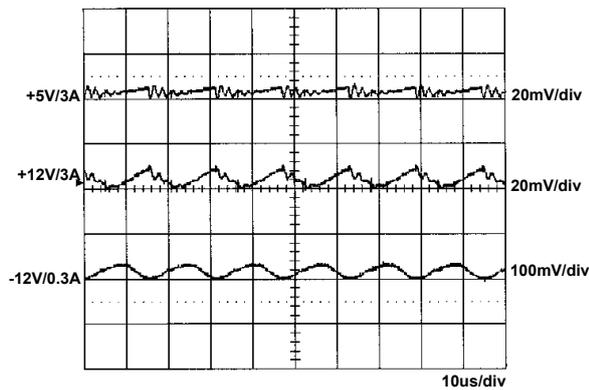


2. Line frequency ripple

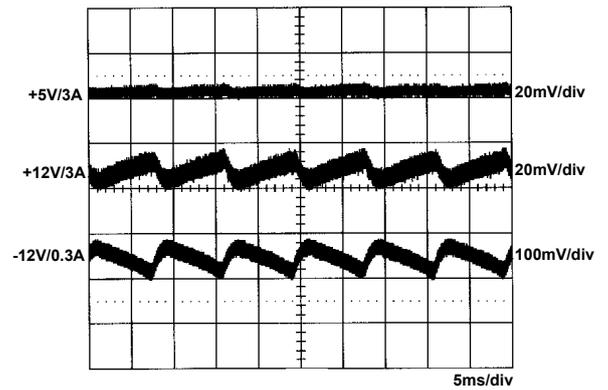


3. Output turn on wave form

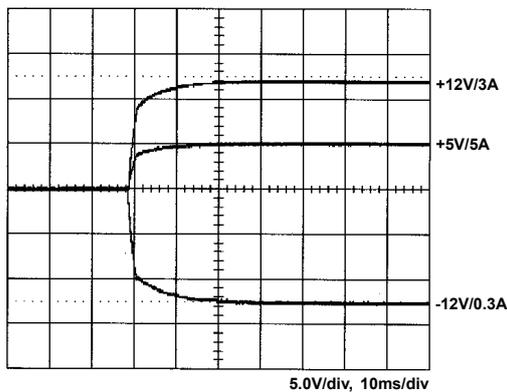


4. Output turn off wave form

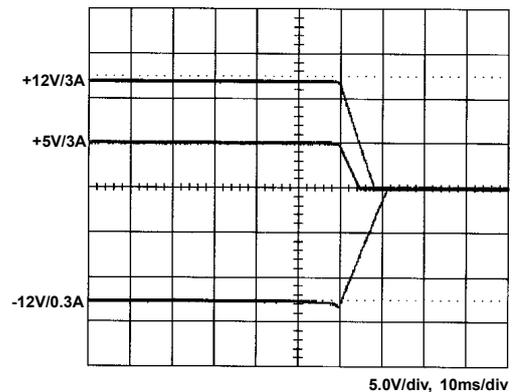


5. Hold-up time

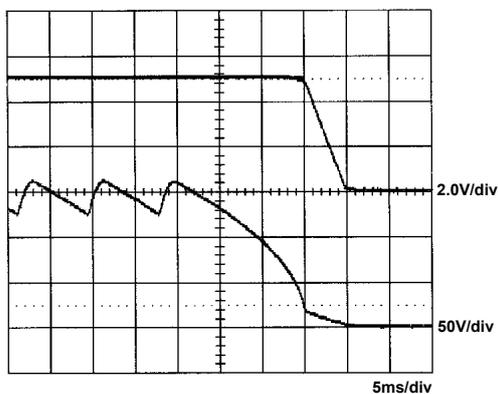


6. Over voltage protection

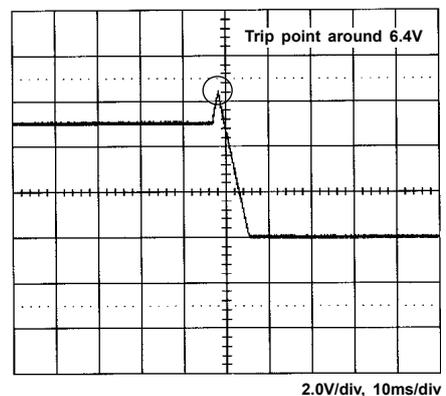


7. +5V step response

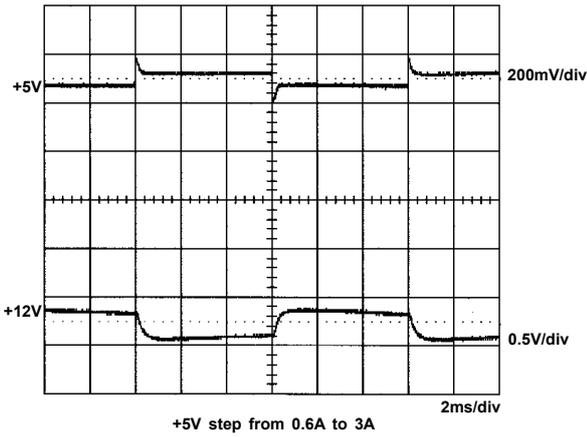


8. +12V step response

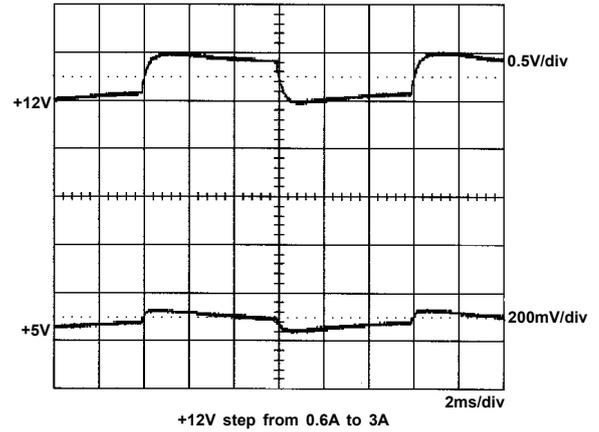

9. FCC B

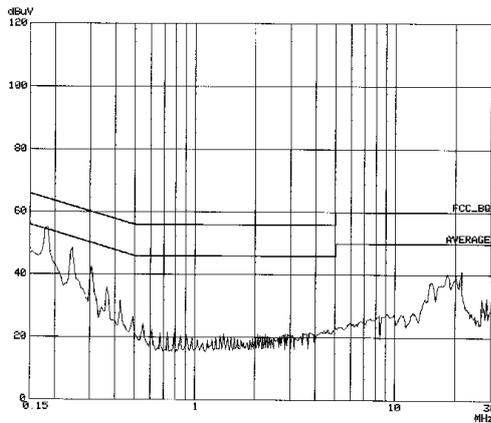

10. EN 55022 B

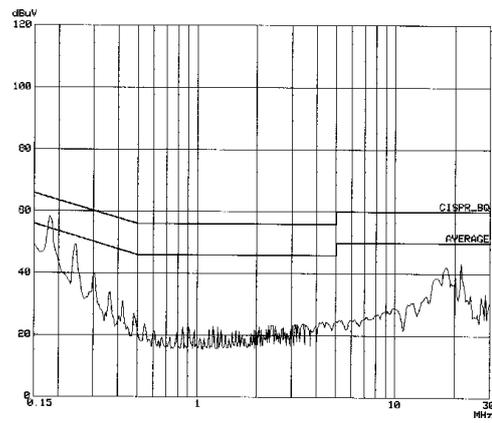

11. Power derating curve

