

Em104-a5362

AMD® Geode™ LX800 PC/104 CPU Module



Features

- **Fanless Design**
- Low Power PC/104 CPU Module
- Soldered Onboard AMD® Geode™ LX800 Processor
- 18/24-bit TTL, and Analog RGB
- Multi-expansion (2 x USB, 2 x Serial Ports, 1 x PATA, 1 x FDD, PC/104, 1 x CF Socket)
- **Extended Operating Temp.: -20 ~ 70°C**

System

CPU	Soldered onboard AMD® Geode™ LX800 500MHz processor
Memory	1 x 200-pin DDR SO-DIMM Socket supporting 200MHz SDRAM up to 1GB
Chipset	AMD® Geode™ CS5536
BIOS	Phoenix-Award PnP Flash BIOS
	1 x Ultra ATA, support 2 IDE devices
Storage	1 x Floppy disk drive
	1 x CompactFlash Type II Socket
Watchdog Timer	1~255 levels reset

I/O

I/O Chip	Winbond W83627HG
Serial Port	2 x COM ports (1 x RS-232, 1 x RS-232/422/485 selectable)
Parallel Port	SPP/EPP/ECP mode selectable
USB Port	2 x USB 2.0 ports
KB/MS	One 1 x 6-pin wafer connector (PS/2 interface for Keyboard and Mouse)
Expansion Bus	PC/104 interface

Ethernet

Chipset	1 x Realtek RTL8100CL PCI 10/100Base-T Ethernet controller
----------------	--


Display

Graphics Chipset	AMD® Geode™ LX800 CPU integrated VGA controller with 2D Engine (Shared memory Max. 64MB)
Graphics Interface	LCD: 18/24-bit TTL up to 1280 x 1024

Mechanical & Environmental

Power Requirement	Small 4P AT power connector
Power Consumption	1.99A/5V
Operating Temp.	-20 ~ 70°C (-4 ~ 158°F)
Operating Humidity	0 ~ 90% (non-condensing)
Dimension (L x W)	96 x 90 mm (3.8" x 3.5")

Dimensions

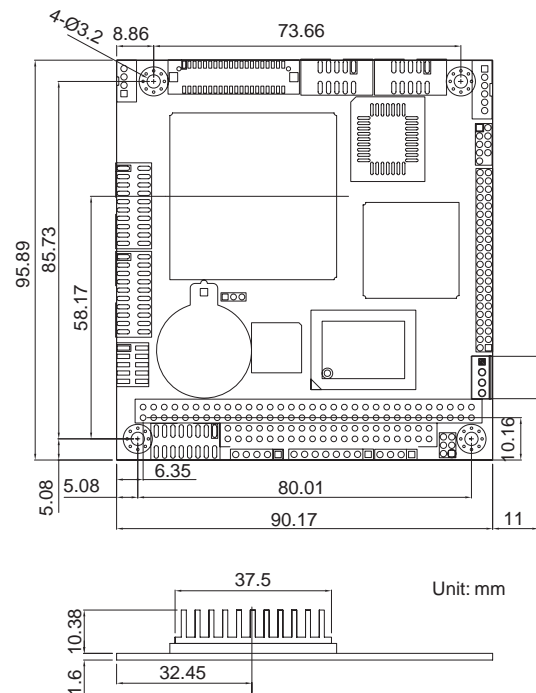

Ordering Information

Em104-a5362VL/LX800 AMD® Geode™ LX800 PC/104 CPU module

CBK-09-5362-00	Cable kit	
	1 x IDE cable	1 x KB & MS cable
	1 x USB cable	1 x VGA cable
	2 x COM port cables	1 x FDD cable
	1 x LPT cable	1 x Ethernet cable

All specifications are subject to change without notice.