



MEDPC Series for Medical Equipment & OEM/ODM

# MEDPC-9300

High Performance Medical Grade Box PC with AMD Ryzen™ Embedded V1000

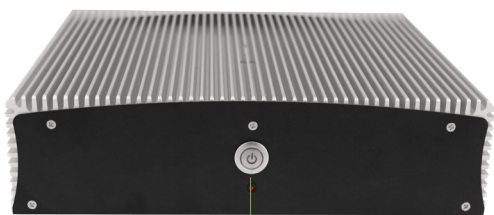

Power button

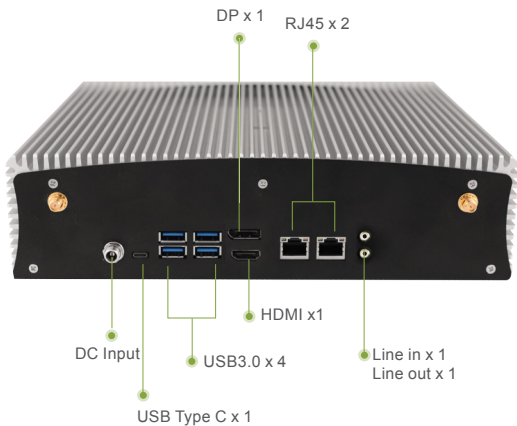

## Features

- AMD Ryzen™ Embedded V1807/ V1605B
- Vega GPU with up to 11 / 8 Compute Units
- 2x DDR4-2400 SO-DIMM, dual channel, Max. 32/ 24GB
- 1 x USB Type C
- 1x PCI-E(8x), 1x Mini PCI-E socket, 1x M.2 (M-key). 1X M.2 ( E-key)
- 4K for 1x HDMI(2.0a), 1x DisplayPort (1.4)

## Application

- HIS, LIS, RIS
- Pharmaceutical industry
- Biotech Lab
- Signage in hospital
- Equipment control

## Specifications

### System

Processor	AMD Ryzen™ Embedded V1000 Processor on board (FP5 BGA package)
System Memory	DDR4 SoDIMM x2, Max. 32GB (V1807B) DDR4 SoDIMM x2, Max. 24GB (V1605B)
Graphics	Next-gen AMD Vega GPU integrated up to 11 (V1807B) Next-gen AMD Vega GPU integrated up to 8 (V1605B)
Ethernet	2x RJ45
Expansion Interface	1x PCI-E(8x),1x Mini PCI-E,1x M.2 (M-key, type:2230) ,1x M.2 (E-key, type:2280),
BIOS	AMI
OS Support	Win 10 IoT Enterprise 64-bit / Linux Ununtu 64-bit

### Display

Video Out	1x HDMI (2.0a), 1x DisplayPort (1.4), 1x 24-bit dual channel LVDS or eDP
Display	Up to 3840 x 2160 resolution, at 60Hz
HDMI	Up to 3840 x 2160 resolution, at 60Hz

### I/O

Storage	1x mSATA, 1x M.2
USB	2x USB 3.1 , 2x USB 2.0 , 1xUSB TypeC
Audio	Built-in HD audio w/ALC662 codec for 5.1 channel
LAN	2X RJ 45Gigabit Ethernet
Audio Jack	1 x Line-In, 1 x Line-Out
GPIO	Digital I/O (4in/4out)
Power Input	Screw Lock DC Jack

### Mechanical and Environmental

Power Requirement	DC12V power input
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Net Weight	2.5 kg in the single layer, 3.7 kg in two layers
Gross weight	3.3 kg in the single layer, 4.0 kg in two layer.
Dimension	260 x 220 x 65 mm for single layer 260x 220 x 78.5 mm for two layers
Package Dimension (W x D x H)	300 x 280 x 95 mm