


# ONYX-515

15" LED LCD Monitor



CE FC

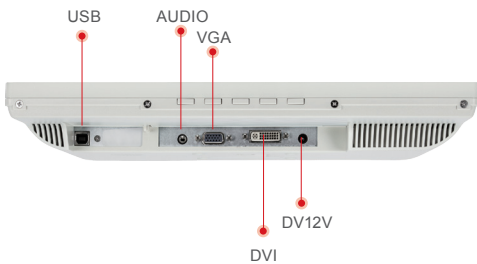

## Features

- 15" LCD Panel with LED Backlight
- Compact and Terse Design
- Wide View Angle 160°(H)/130°(V)
- VGA x 1, DVI x1
- 5 wire resistive touch screen
- CE/ FCC Class B Passed 18, EN60601-1:2006
- Low Power Consumption

## Specifications

### Display

Size	15"
Resolution	1024 x 768
Max. Colors	16.2M
Brightness (Typ.)	250 nits
Viewing Angle (CR=10)(Typ.)	160°(H)/130°(V)
Contrast Ratio (Typ.)	700:1
Touch Screen	5 wire resistive touch screen (optional)

### System

OS Support	Windows® XP, Window® 7
------------	------------------------

### I/O

Audio	Audio-in x 1
Serial Port	USB x 1 for touch controller
Signal	VGA x 1, DVI x 1
Speaker	1W speaker x 1 on back side

### Mechanical and Environmental

Power Consumption	Full Loading :22.8Watts
Power Requirement	DC12V / 5A power input
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Gross Weight	3.4kg (7.5lb)
Net Weight	2.8kg (6.17lb)
Dimension	406 x 418 x 136 mm
EMC	CE/FCC Class B Passed 18, ISO14971, EN 60601-1:2006

## Specifications

- » ONYX-515DTT-A1-1020  
LCD monitor.15" 250nits LED.DC 12V.R-TS.Med adapter
- » ONYX-515DT-A1-1020  
LCD monitor.15" 250nits LED.DC 12V.Med adapter