


Medical Display Series Solution

ONYX-518

18.5" LED LCD Monitor



CE FC

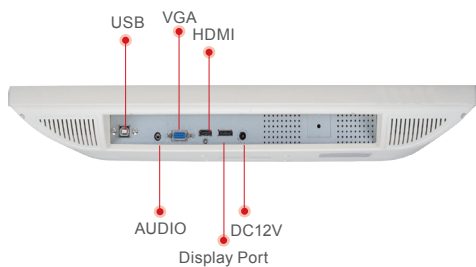

Features

- 18.5" LCD Panel with LED Backlight
- Compact and Terse Design
- VGA x 1, HDMI x 1, DP x1
- True Flat Screen with PCT Touch
- Invisible OSD Design
- CE/FCC Class B Passed18, EN60601-1:2006
- Low Power Consumption

Specifications

Display

Size	18.5"
Resolution	1366 x 768
Max. Colors	16.7M
Brightness (Typ.)	250 nits
Viewing Angle (CR=10)(Typ.)	170°(H)/160°(V)
Contrast Ratio (Typ.)	1000:1
Touch Screen	Projective capacitive touch screen (optional)

System

OS Support	Windows® XP, Window® 7
------------	------------------------

I/O

Audio	Audio-in x 1
Serial Port	USB x 1 for touch controller
Signal	VGA x 1, HDMI x 1, DP x 1
Speaker	2W speaker x 2 on back side

Mechanical and Environmental

Power Consumption	Full Loading :18Watts
Power Requirement	DC12V / 5A power input
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Gross Weight	5.4kg (11.9lb)
Net Weight	4.3kg (9.48lb)
Dimension	498 x 438 x 256 mm
EMC	CE/FCC Class B Passed 18, ISO14971, EN 60601-1:2006

Specifications

- » ONYX-518DTT-A1-1020
LCD monitor:18.5" 250nits LED 2.DC 12V.C-TS.Med adapter
- » ONYX-518DT-A1-1020
LCD monitor:18.5" 250nits LED 2.DC 12V.Med adapter